



VRS2RZN - ETP

Torque Specification (Nm)

These cylinder head bolts are “torque to yield” and require replacing.

This VRS Gasket set is supplied with the thickest gasket option.


The head gasket is manufacture to an OEM spec. It does not allow excessive over boring. Check there is adequate clearance around each cylinder bore before fitment.

Bolts 1 - 10:

- Stage 1: 44Nm
- Stage 2: +90°
- Stage 3: +90°


Bolt 11 & 12:

- Stage 1: 19Nm



Important Information:
Ensure you apply sealant to the half moon camshaft plug.

Torque Sequence

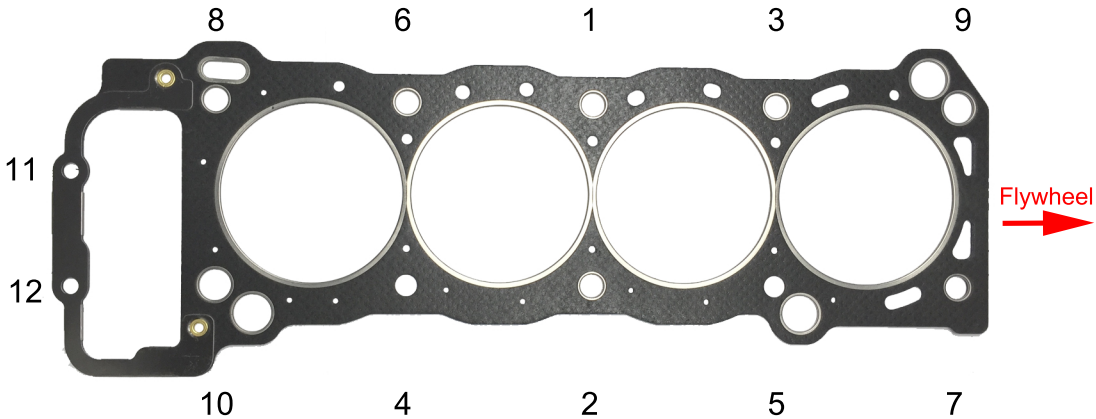

ETP - Engine & Transmission Parts

72 Killara Road, Campbellfield, Vic 3061

Ph: 03 9357 0854 Web: www.etponline.com.au

Please Note: **ETP will not accepted return of open gasket sets**