

VRSYD25N - ETP

Torque Specification (Nm)

These cylinder head bolts are "torque to yield" and require replacing.

This VRS Gasket set is supplied with the thickest gasket option.

The head gasket is manufacture to an OEM spec. It does not allow excessive over boring. Check there is adequate clearance around each cylinder bore before fitment.

All Bolts:


Stage 1: 39Nm Stage 2: +180°

Stage 3: Loosen all bolts

Stage 4: 39Nm Stage 5: +90° Stage 6: +90°

270° 90° 180°

Torque Sequence

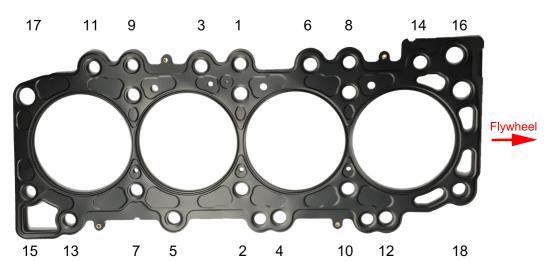

ETP - Engine & Transmission Parts 72 Killara Road, Campbellfield, Vic 3061 Ph: 03 9357 0854 Web: www.etponline.com.au